



Uninterruptible Power Supply MODULYS XS TC *from 2,5 to 15kVA / kW*



The commitments of Socomec to respect the environment

As part of its environmental policy, Socomec is committed to:

- Develop innovating solutions primarily focused on energy efficiency to help its customer in the design of less energy-consuming, better managed and ecofriendly installations.
- Diversify its product offer in the renewable energy and energy efficiency sectors,
- Minimize the environmental impact of its industrial activities through the progressive ISO 14001 certification of its production sites,
- Minimize at the preliminary design stage the environmental impacts of its products taking into account their whole life cycle,
- Provide his customers with reliable data on the environmental performance of the products.

Socomec is member of :



■ Product information

Reference product

The representative product is the Modulys XS TC with sales reference MOD3-TC3.

Input dependency characteristics	Configuration	Power kVA/kW	Dimensions	Acoustic noise	Power factor
VFI	online double conversion	15/15	WxHxD max 600x1430x600	≤52,5dBA	1

Functional unit

To protect the load of 15 kVA against input power failure during 15 years and provide a backup time ranging from a few minutes to a few hours in case of a power outage.

■ Material and substances

Declaration of the constitutive materials according to IEC 62474

Total mass of the reference product (including packaging): **433 kg**

Total mass of packaging: **16,5 kg**. The packaging is composed of carton, paper, film packaging and a wooden pallet

Metals, 78.7% weight		Plastics, 8.3% weight		Others, 13,0% weight	
Other non-ferrous metals and alloys	44,4%	Other Thermoplastics	7,4%	Other inorganic materials	7,6%
Other Ferrous alloys, non-stainless steels	26,7%	Other Plastics and Rubber	0,8%	Other Organic Materials	4,9%
Aluminum and its alloys	4,6%	PolyVinylChloride (PVC)	0,1%	Ceramics / Glass	0,5%
Copper and its alloys	3,0%				
Zinc and its alloys	<0,1%				

The estimated content of recycled materials is 9,8%, based on a Life Cycle Analysis model with EIME software.

Substances management

Socomec is leading a program to limit the use of hazardous substances in the design of new products and to monitor the presence of substances of concern in its supplies to anticipate future use restrictions.



Directive 2011/65/EU : Product references covered by this PEP meet the requirements of the RoHS Directive on the restriction of substances such as lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyl (PBB), polybrominated diphenyl ethers (PBDEs) and phthalates (DIBP, DEHP, BBP, DBP).



As per article 33 of REACH, we declare Socomec products that contain SVHC's:

SVHC	CAS number	Inclusion date in the candidate list	SVHC included in annex XIV (authorization list)	SVHC localization
Lead	7439-92-1	June 27th 2018	No	Lead batteries

■ Manufacturing



The products covered by this PEP are manufactured on the production site whose environmental management system has been ISO 14001 certified. Impacts on the environment are reduced by optimizing its energy consumption and by practicing a rigorous waste management

■ Distribution

As part of its distribution policy aiming to respect the environment, Socomec is in favor of groupage transports and ISO14001 certified logistic partners.

■ Installation

The installation stage consists in connecting the product to the existing electrical installation. The installation does not generate any significant impacts on the environment, except impacts from packaging waste.

■ Use phase

Consumption scenario

Use phase scenario: European energy mix

Load (%)	25%	50%	75%	100%
Proportion of time spent (%)	25%	50%	25%	0%

Total energy consumption during 15 years

Total average energy consumption	80 072 kWh
Average UPS efficiency	Up to 91,45%

Care and maintenance

It is recommended to carry out periodic specialized maintenance in order to keep the equipment at the maximum level of efficiency and to avoid the installation being out of service with possible damage/risks

Typical parts which are subject to maintenance:

	Maintenance frequency
Life time (years)	Batteries
15	2

Consumables


The product does not require consumables.

■ End of life

End of life treatment

The following parts require specific care and selective treatment in accordance with Annex VII of the WEEE Directive 2012/19/EU - Waste of electrical and electronic equipment.

Maintenance and disassembly should always be conducted by qualified personnel.

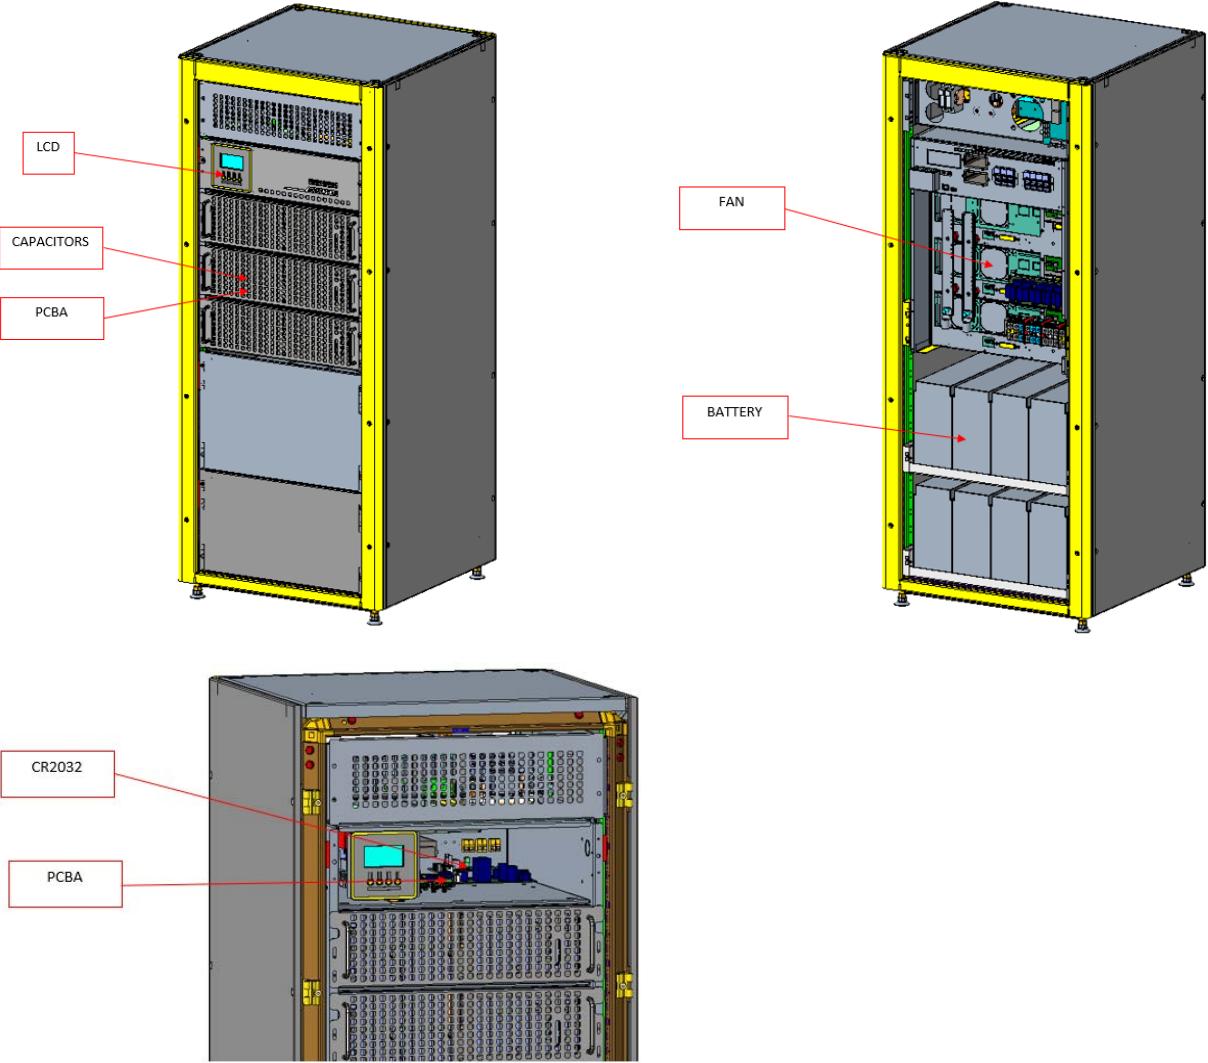

Potential Security hazard for operators	Necessity of a selective treatment
LCD screen	LCD screen
Capacitors	Capacitors
Battery	PCBA
	Fans
	Battery
	Coin battery CR2032

Recovery potential of the product according to IEC TR 62635

The total potential value of this product is 77.8%.
This potential value takes into account the material recycling and energy recovery.

■ Additional information



This environmental declaration lists the information required in the Annex A and B (substances: criterion 1) of IEC 62040-4 (Edition 1.0 2013-04) and EN 62040-4:2013 (2014-03).

■ Environmental impacts

Calculation methodology: life cycle assessment (LCA)



The calculation of the impacts on the environment was made using a life cycle assessment methodology in accordance with the ISO 14040 requirements and with PEP eco passport product category rules. For more details follow the link: www.pep-ecopassport.org
This study was carried out with the version 5.9.3 of the software EIME with version database CODDE-2020-12. The software is distributed by CODDE which is a subsidiary of Bureau Veritas.

This product follows the rules defined in the PSR-0010-ed1.1-EN-2015 10 16.

The whole life cycle has been taken into account:

Step	Geographical representativeness	Scenario
Manufacturing (M)	Production of electronic components : Asia Production of other components and packaging : Europe Assembly : Italy Last logistic platform : Italy	From the raw material extraction to the last Socomec logistic platform, including packaging Waste generated during manufacturing phase are taken into account.
Distribution (D)	Distribution scenario : Europe	From the last Socomec logistic platform to the final customer. No product reconditioning.
Installation (I)	Transport and treatment of packaging wastes : Local	Local road transport of 1000 km of generated wastes to the treatment site, and landfilling
Use phase (U)	Energy mix : Europe Production of maintenance components : analog to manufacturing phase	Power consumption required during 15 years and maintenance according to use scenario described on page 3.
End Of Life (EOL)	Transport and treatment : Local	Road transport of 1000 km from the final customer to the treatment sites. End of life treatment.

Environmental impacts

The following impacts have been calculated to best represent geographically and technologically each step of the life cycle.

Indicators	Unit	Total impact	M	D	I	U	EOL
Contribution to global warming	kg CO ₂ eq.	7,86E+04	2,46E+04	2,26E+02	0*	5,37E+04	9,16E+01
Contribution to ozone layer depletion	kg CFC-11 eq.	4,10E-03	3,02E-04	4,58E-07	0*	3,80E-03	1,36E-06
Contribution to the soil and water acidification	kg SO ₂ eq.	7,46E+02	5,23E+02	1,02E+00	0*	2,21E+02	3,77E-01
Contribution to water eutrophication	kg (PO ₄) ³⁻ eq.	6,96E+01	5,53E+01	2,34E-01	1,03E-02	1,39E+01	2,60E-01
Contribution to photochemical ozone formation	kg C ₂ H ₄ eq.	3,88E+01	2,66E+01	7,22E-02	0*	1,21E+01	2,82E-02
Contribution to the depletion of abiotic resources - elements	kg Sb eq.	3,82E+00	1,30E+00	0*	0*	2,52E+00	0*
Contribution to the depletion of abiotic resources - fossil fuels	MJ	9,30E+05	3,16E+05	3,18E+03	0*	6,10E+05	1,07E+03
Contribution to water pollution	m ³	7,10E+06	4,02E+06	3,72E+04	0*	3,04E+06	1,25E+04
Contribution to air pollution	m ³	7,46E+06	3,55E+06	9,28E+03	0*	3,89E+06	7,64E+03
Use of renewable primary energy (excl. raw materials)	MJ	1,34E+05	5,80E+02	0*	0*	1,33E+05	1,45E+01
Use of renewable primary energy used as raw materials	MJ	3,25E+02	3,25E+02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,34E+05	9,05E+02	0*	0*	1,33E+05	1,45E+01
Use of non-renewable primary energy (excl. raw materials)	MJ	1,28E+06	3,42E+05	3,20E+03	0*	9,32E+05	1,12E+03
Use of non-renewable primary energy used as raw materials	MJ	1,67E+03	6,97E+02	0*	0*	0*	0*
Total use of non-renewable primary energy resources	MJ	1,28E+06	3,42E+05	3,20E+03	0*	9,33E+05	1,12E+03
Use of secondary materials	kg	4,43E+01	4,43E+01	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of non-renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Net use of fresh water	m ³	1,90E+05	6,57E+01	0*	0*	1,90E+05	0*
Hazardous waste disposed of	kg	1,34E+03	1,27E+03	0*	0*	6,91E+01	2,22E-01
Non-hazardous waste disposed of	kg	1,97E+05	1,18E+03	0*	0*	1,95E+05	4,68E+02
Radioactive waste disposed of	kg	1,31E+02	1,08E+00	0*	0*	1,30E+02	1,70E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for recycling	kg	2,29E-02	2,29E-02	0*	0*	0*	0*
Materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*
Exported energy	MJ by energy vector	0,00E+00	0*	0*	0*	0*	0*
Total use of primary energy during the life cycle	MJ	1,41E+06	3,43E+05	3,20E+03	0*	1,07E+06	1,13E+03

NB : 0* means that this impact either represents less than 0.01% of the total life cycle of the reference flow, or has no impact (in the case where the total impact is zero).

Registration number : SOCO-00050-V01.01-EN		Drafting Rules : PCR-ed3-FR-2015 04 02 Supplemented by « PSR-0010-ed1.1-EN-2015 10 16 »	
Verifier accreditation number : VH12		Information and reference documents : www.pep-ecopassport.org	
Date of issue : 03-2022		Validity period : 5 years	
Independant verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal : ☒		External : ☐	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 : 2016			
The elements of the present PEP cannot be compared with elements from another program			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

This document is intended to be only informative and non-contractual and does not create any right or obligation or commitment for Socomec towards its associates, customers or any other person or entity. All the values indicated in this document may change depending on many factors (use conditions, applications, installations, environment...). The life time mentioned in this document is only indicative and is not intended to be the minimal, maximal or average life time of the product.